


92952: PERFORMANCE

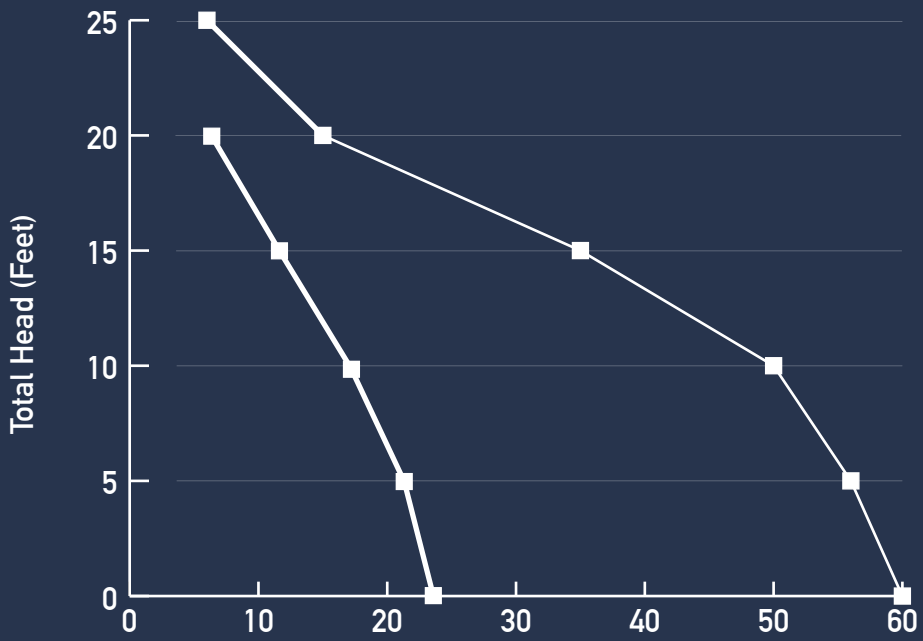

BACKUP - 92910 | PRIMARY - 92352
low Rate (GPM - Gallons Per Minute)

BACKUP - 92910

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	23	22	18	13	8	-
Gallons Per Hour	1380	1320	1080	780	480	-

PRIMARY - 92352

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	60	56	50	35	15	6
Gallons Per Hour	3600	3360	3000	2100	900	360

92952: TECHNICAL SPECIFICATIONS

PUMP TYPE / MODEL	Thermoplastic Backup / 92910	Cast Iron Primary / 92352
HORSEPOWER	DC	1/3
DRAW	12 volt	7.6 amps
SWITCH TYPE	Vertical	Vertical
DISCHARGE SIZE	1-1/4" or 1-1/2"	1-1/2"
DISCHARGE TYPE	Top	Side
CORD LENGTH	10'	10'
SOLIDS HANDLING	1/8"	1/2"
IMPELLER TYPE	Thermoplastic	Thermoplastic
WARRANTY	3 Year	
BATTERY BOX	Thermoplastic Construction	
ELECTRONIC PANEL	Indicator lights and fuse	
RECOMMENDED BATTERY	12 Volt deep cycle - sold separately	

92952: OPTIONAL ACCESSORIES

BASINS	BASIN COVERS	ADAPTERS
--------	--------------	----------