


92352RTG-A / P: PERFORMANCE

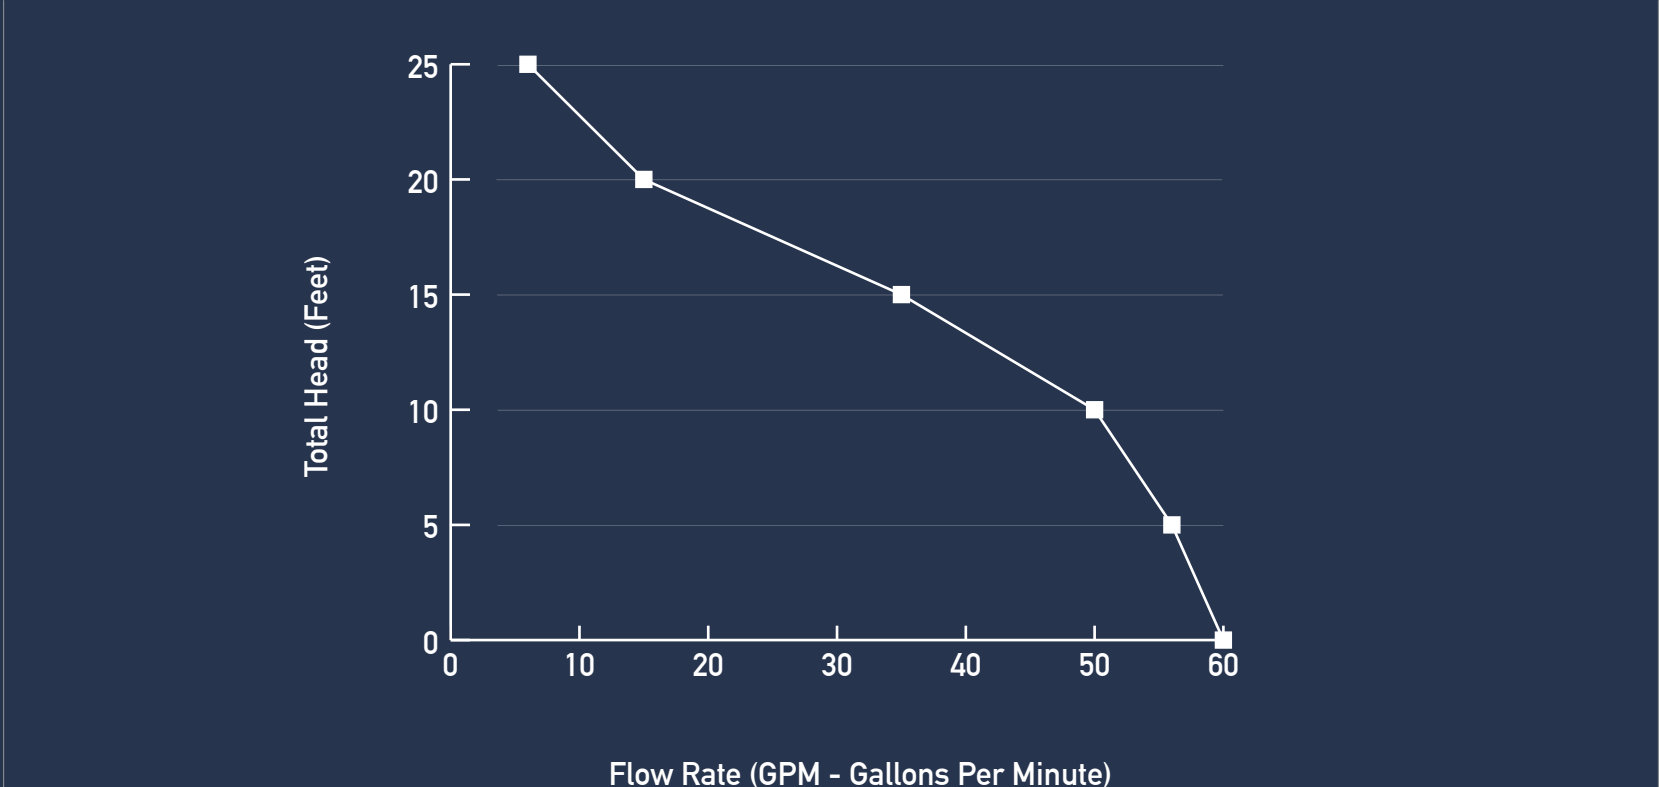

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	60	56	50	35	15	6
Gallons Per Hour	3600	3360	3000	2100	900	360

92352RTG-A / P: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/3
AMPS	7.6
CONSTRUCTION	Cast Iron
SWITCH TYPE	Vertical
DISCHARGE SIZE	1-1/2"
DISCHARGE PIPE	92352RTG A - ABS / 92352RTG P - PVC
CORD LENGTH	10'
SOLIDS HANDLING	1/2"
IMPELLER TYPE	Thermoplastic
LIQUID TEMP. RANGE	35° F - 120° F
WARRANTY	3 Year

92352RTG-A / P: OPTIONAL ACCESSORIES

BATTERY BACKUP	ALARMS	HOSE KIT
BASINS	BASIN COVERS	ADAPTERS