


# 92301: PERFORMANCE

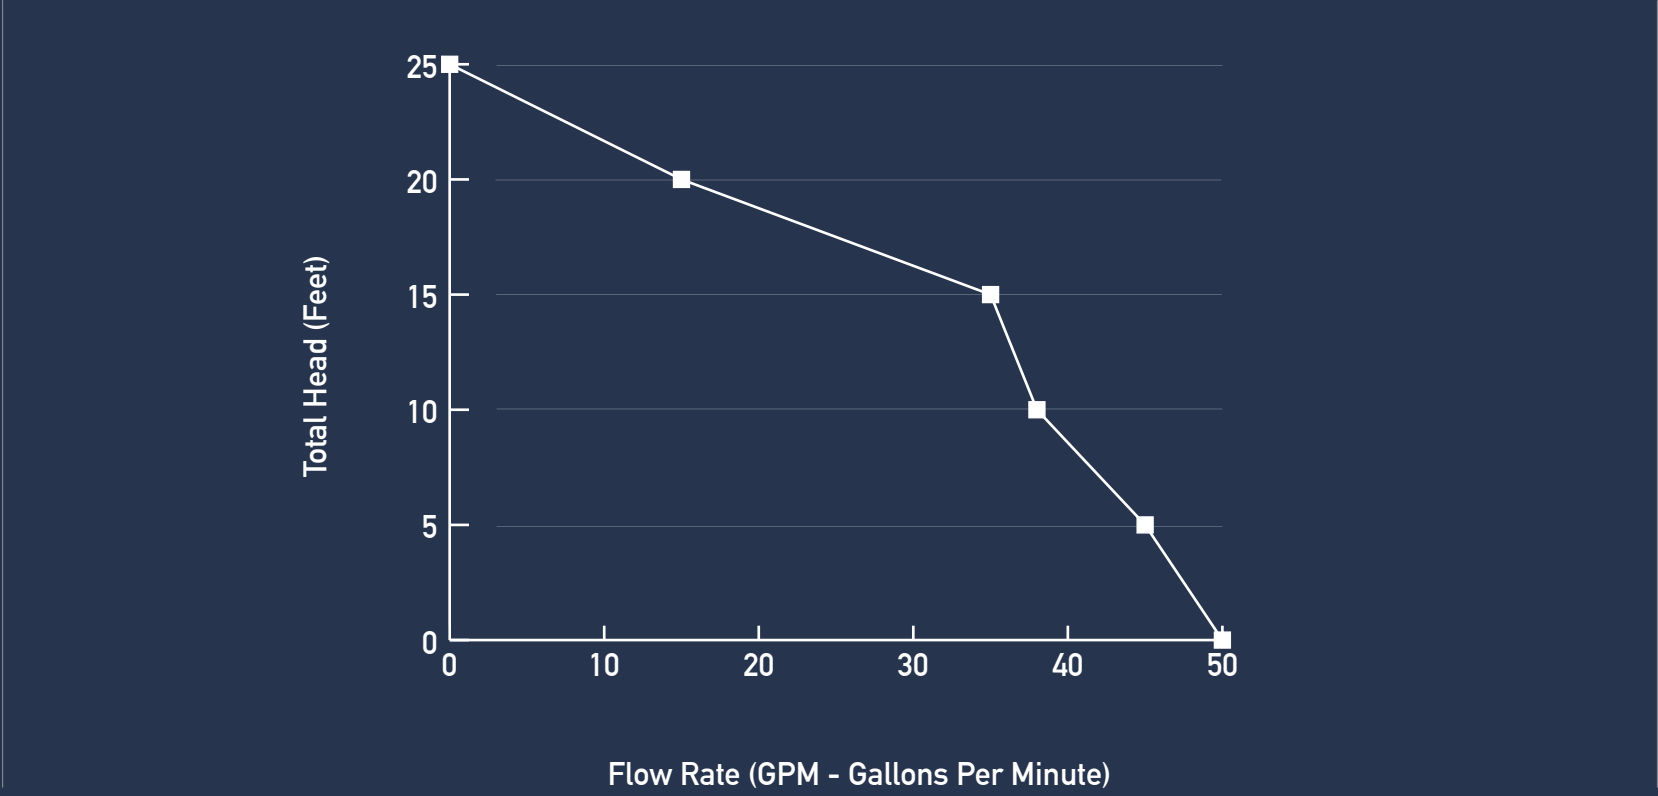

| HEAD               | 0'   | 5'   | 10'  | 15'  | 20' | 25' |
|--------------------|------|------|------|------|-----|-----|
| Gallons Per Minute | 50   | 40   | 38   | 35   | 15  | 0   |
| Gallons Per Hour   | 3000 | 2700 | 2280 | 2100 | 900 | 0   |

# 92301: TECHNICAL SPECIFICATIONS

|                        |                                      |
|------------------------|--------------------------------------|
| HORSEPOWER             | 1/3                                  |
| AMPS                   | 2.76                                 |
| CONSTRUCTION           | Cast Iron                            |
| SWITCH TYPE            | Vertical                             |
| DISCHARGE SIZE         | 1-1/2"                               |
| DISCHARGE TYPE         | Side                                 |
| CORD LENGTH            | 10'                                  |
| SOLIDS HANDLING        | 3/8"                                 |
| IMPELLER / COLUMN TYPE | Stainless Steel / Steel              |
| SWITCH ON POINT        | Adjustable                           |
| SWITCH OFF POINT       | 4"                                   |
| LIQUID TEMP. RANGE     | 35° F - 180° F                       |
| PUMPS DOWN TO          | 4" From Surface When Used As Utility |
| WARRANTY               | 3 Year                               |

# 92301: OPTIONAL ACCESSORIES

|                |              |          |
|----------------|--------------|----------|
| BATTERY BACKUP | CHECK VALVES | ALARMS   |
| BASINS         | BASIN COVERS | HOSE KIT |
| ADAPTERS       |              |          |