


# 93508: PERFORMANCE

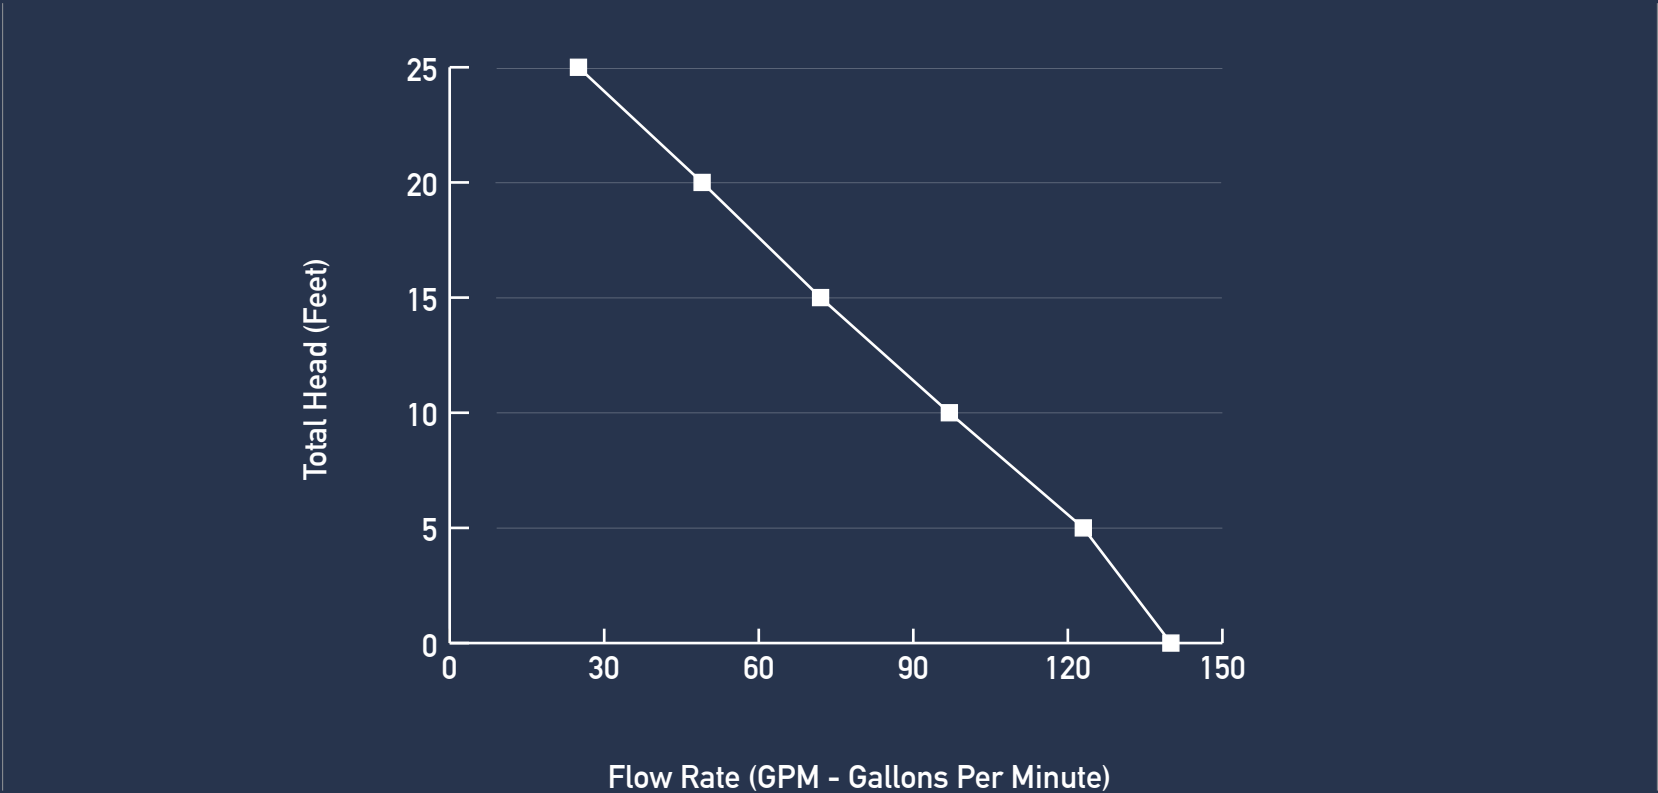

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	76	65	57	42	12	1
Gallons Per Hour	4560	3900	3420	2520	720	60

# 93508: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/2
AMPS	7.6
CONSTRUCTION	Cast Iron
SWITCH TYPE	Tethered
DISCHARGE SIZE	2"
DISCHARGE TYPE	Side
CORD LENGTH	10'
SOLIDS HANDLING	2"
IMPELLER TYPE	Thermoplastic, Non-Clogging Vortex
SWITCH ON POINT	16"
SWITCH OFF POINT	8"
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	3" From Surface When Used As Utility
WARRANTY	1 Year

# 93508: OPTIONAL ACCESSORIES

BASINS	BASIN COVERS	ALARMS
ADAPTERS	CHECK VALVES	