


# 91025 / 91026: PERFORMANCE

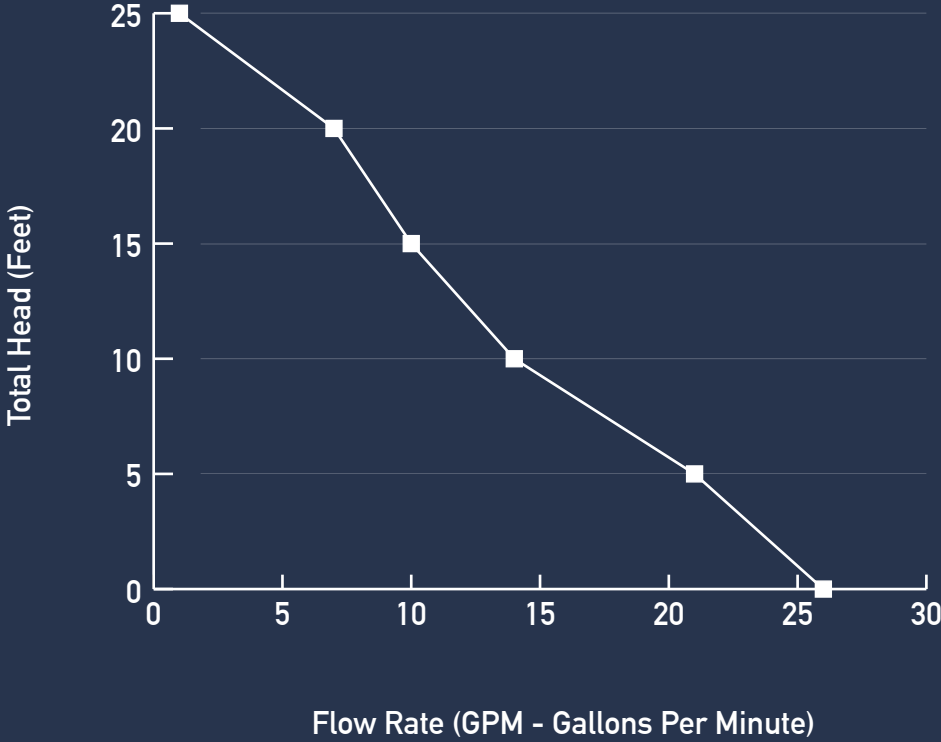

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	26	21	14	10	7	1
Gallons Per Hour	1560	1260	840	600	420	60

# 91025 / 91026: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/5
AMPS	3.6
CONSTRUCTION	Thermoplastic
DISCHARGE SIZE	1-1/4"
DISCHARGE TYPE	Top
CORD LENGTH	91025 - 10' / 91026 - 25'
SOLIDS HANDLING	1/8"
IMPELLER TYPE	Thermoplastic
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	1/8" From Surface
WARRANTY	1 Year

# 91025 / 91026: OPTIONAL ACCESSORIES

FLOAT SWITCHES	CHECK VALVES	ALARMS
LAKE SCREEN FILTERS	ADAPTERS	HOSE KITS