


# 92330 / 92335: PERFORMANCE

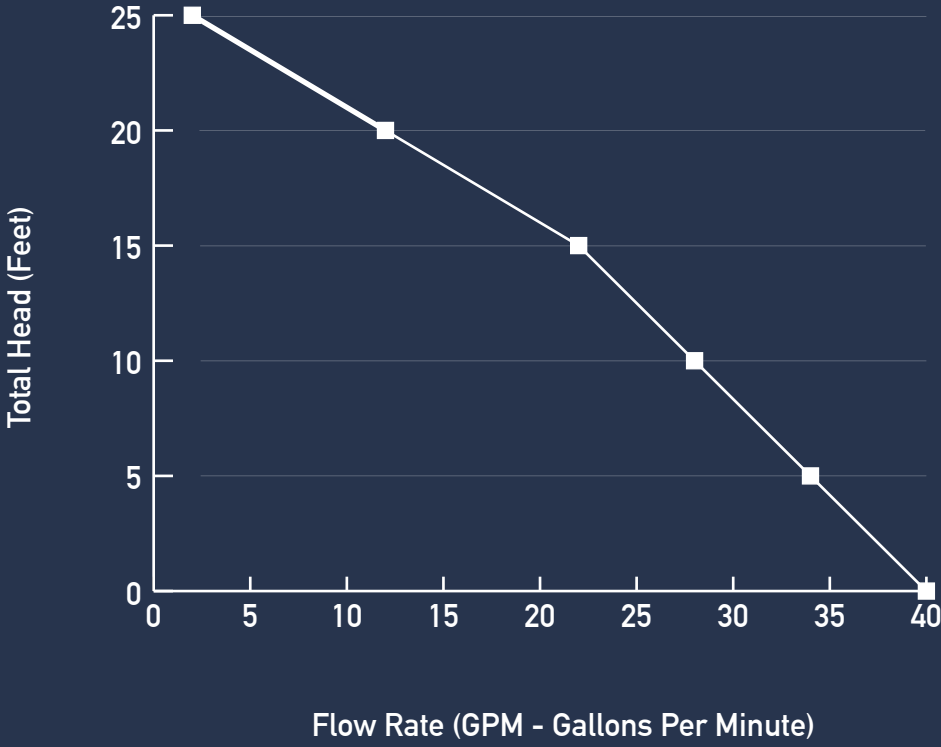

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	40	34	28	22	12	2
Gallons Per Hour	2400	2040	1680	1320	720	120

# 92330 / 92335: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/3
AMPS	4.1
CONSTRUCTION	Thermoplastic
SWITCH TYPE	Tethered
DISCHARGE SIZE	1-1/4" or 1-1/2"
DISCHARGE TYPE	Top
CORD LENGTH	92330 - 10' / 92335 - 25'
SOLIDS HANDLING	1/8"
IMPELLER TYPE	Thermoplastic
SWITCH ON POINT	10"
SWITCH OFF POINT	5"
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	1/2" From Surface When Used As Utility
WARRANTY	1 Year

# 92330 / 92335: OPTIONAL ACCESSORIES

BATTERY BACKUP	CHECK VALVES	ALARMS
BASINS	BASIN COVERS	HOSE KIT
ADAPTERS	BASE	FILTERS