


91370 / 91370-25: PERFORMANCE

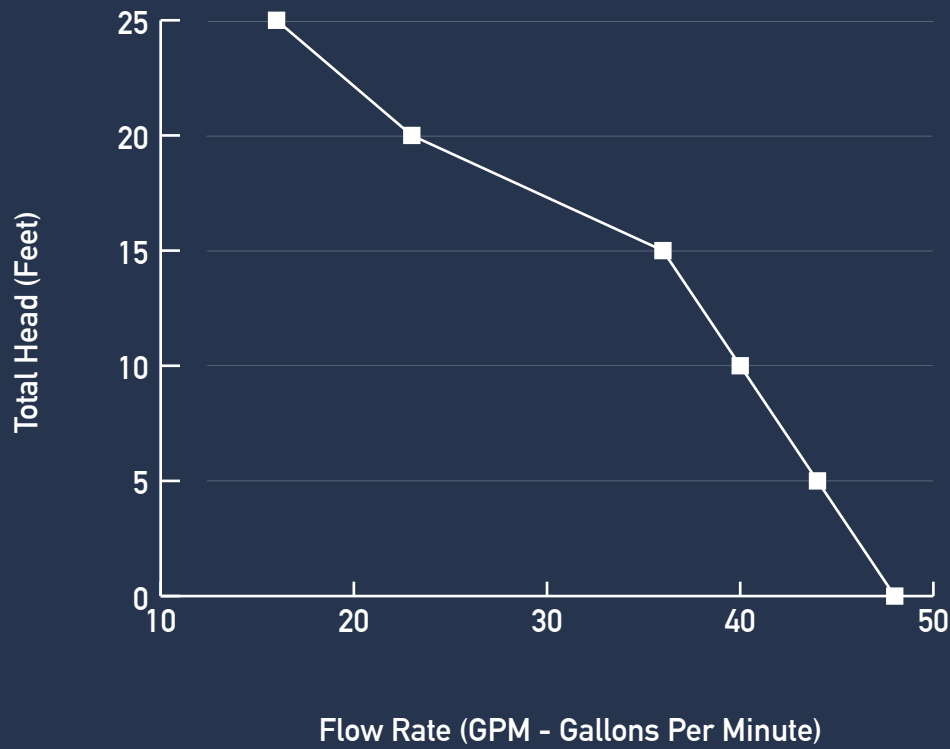

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	48	44	40	36	23	16
Gallons Per Hour	2880	2640	2400	2160	1380	960

91370 / 91370-25: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/3
AMPS	4.1
CONSTRUCTION	Thermoplastic
DISCHARGE SIZE	1-1/2"
DISCHARGE TYPE	Side
CORD LENGTH	91370 -10' / 91370-25 - 25'
SOLIDS HANDLING	3/8"
IMPELLER TYPE	Thermoplastic
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	1" From Surface
WARRANTY	1 Year

91370 / 91370-25: OPTIONAL ACCESSORIES

FLOAT SWITCHES	CHECK VALVES	ALARMS
LAKE SCREEN FILTERS	ADAPTERS	HOSE KITS