


92342RTG-A / P: PERFORMANCE

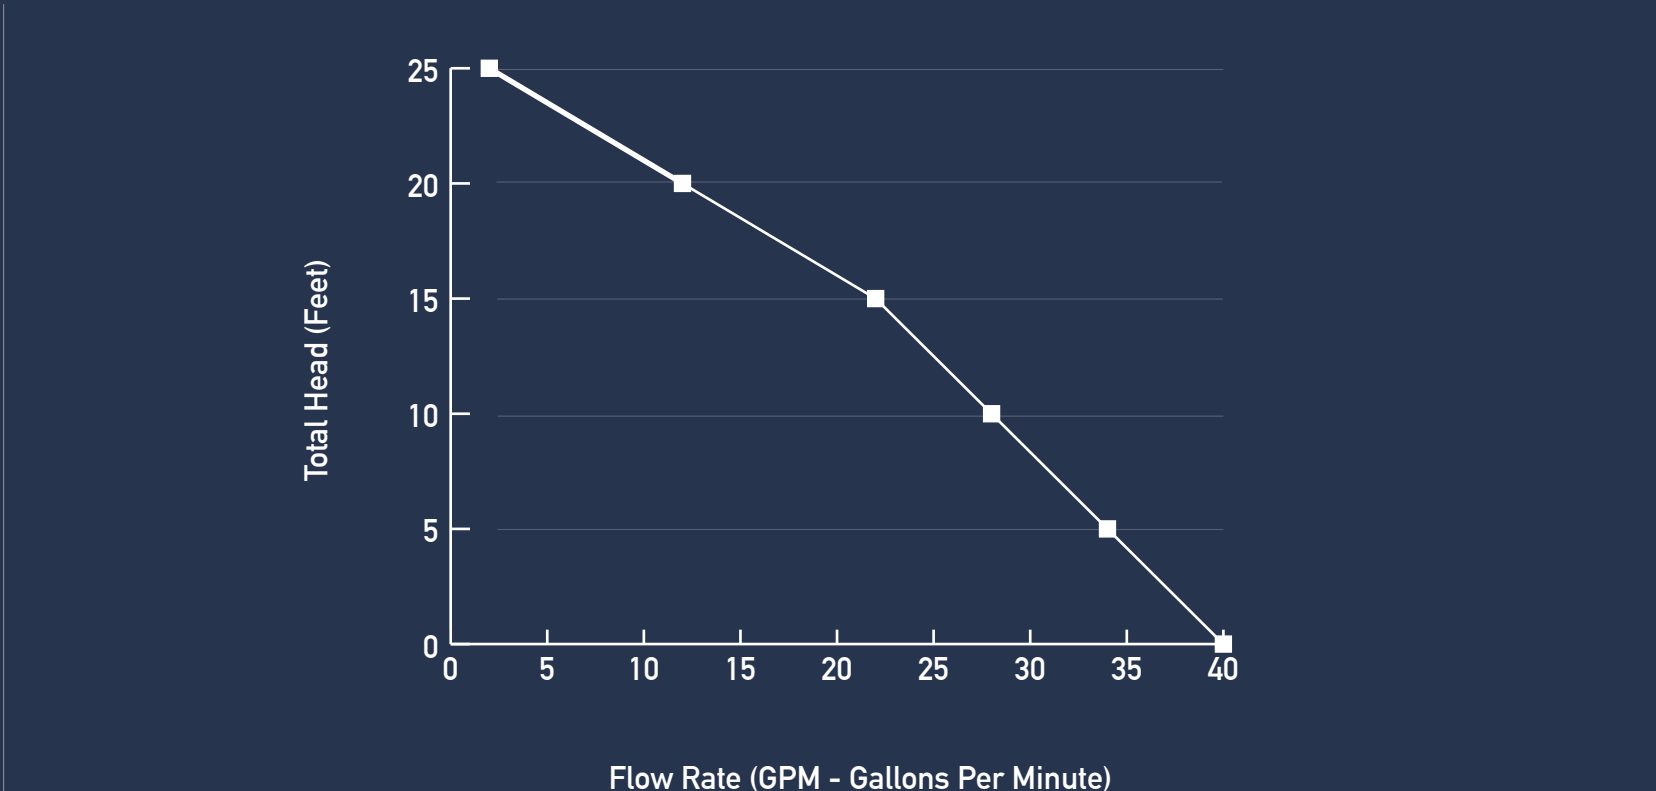

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	40	34	28	22	12	2
Gallons Per Hour	2400	2040	1680	1320	720	120

92342RTG-A / P: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/3
AMPS	4.1
CONSTRUCTION	Thermoplastic
SWITCH TYPE	Vertical
DISCHARGE SIZE	1-1/4" or 1-1/2"
DISCHARGE PIPE	92342RTG A - ABS / 92342RTG P - PVC
CORD LENGTH	10'
SOLIDS HANDLING	1/8"
IMPELLER TYPE	Thermoplastic
LIQUID TEMP. RANGE	35° F - 120° F
WARRANTY	1 Year

92342RTG-A / P: OPTIONAL ACCESSORIES

BATTERY BACKUP	ALARMS	HOSE KIT
BASINS	BASIN COVERS	ADAPTERS