


# 91014: PERFORMANCE

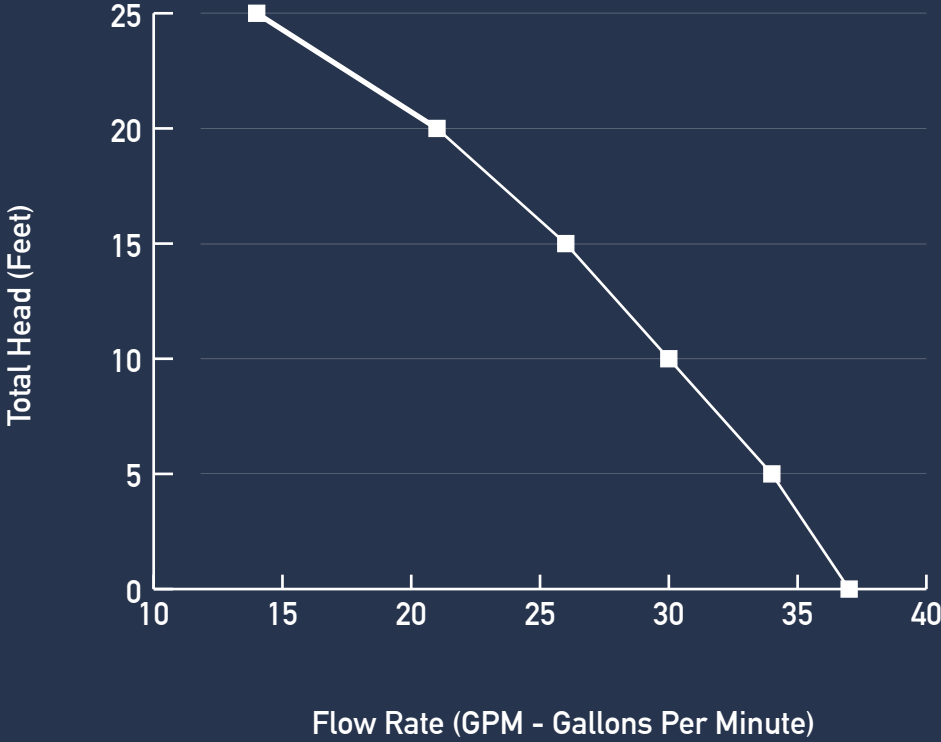

| HEAD               | 0'   | 5'   | 10'  | 15'  | 20'  | 25' |
|--------------------|------|------|------|------|------|-----|
| Gallons Per Minute | 37   | 34   | 30   | 26   | 21   | 14  |
| Gallons Per Hour   | 2220 | 2040 | 1800 | 1560 | 1260 | 840 |

# 91014: TECHNICAL SPECIFICATIONS

|                    |                   |
|--------------------|-------------------|
| HORSEPOWER         | 1/4               |
| AMPS               | 3.8               |
| CONSTRUCTION       | Thermoplastic     |
| DISCHARGE SIZE     | 1"                |
| DISCHARGE TYPE     | Top               |
| CORD LENGTH        | 8'                |
| SOLIDS HANDLING    | 1/8"              |
| IMPELLER TYPE      | Thermoplastic     |
| LIQUID TEMP. RANGE | 35° F - 120° F    |
| PUMPS DOWN TO      | 1/8" From Surface |
| WARRANTY           | 1 Year            |

# 91014: OPTIONAL ACCESSORIES

|                     |              |           |
|---------------------|--------------|-----------|
| FLOAT SWITCHES      | CHECK VALVES | ALARMS    |
| LAKE SCREEN FILTERS | ADAPTERS     | HOSE KITS |