


91250 / 91255: PERFORMANCE

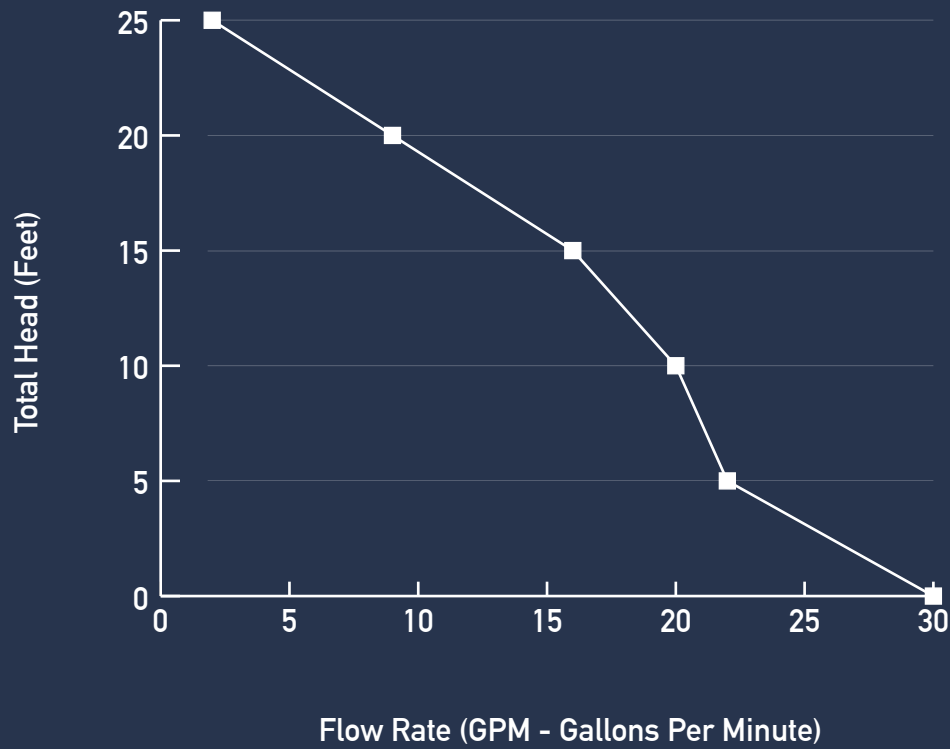

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	30	22	20	16	9	2
Gallons Per Hour	1800	1320	1200	960	540	120

91250 / 91255: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/4
AMPS	3.8
CONSTRUCTION	Thermoplastic
DISCHARGE SIZE	1-1/4"
DISCHARGE TYPE	Top
CORD LENGTH	91250 - 10' / 91255 - 25'
SOLIDS HANDLING	1/8"
IMPELLER TYPE	Thermoplastic
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	1/8" From Surface
WARRANTY	1 Year

91250 / 91255: OPTIONAL ACCESSORIES

FLOAT SWITCHES	CHECK VALVES	ALARMS
LAKE SCREEN FILTERS	ADAPTERS	HOSE KITS