


92509 / 92525: PERFORMANCE

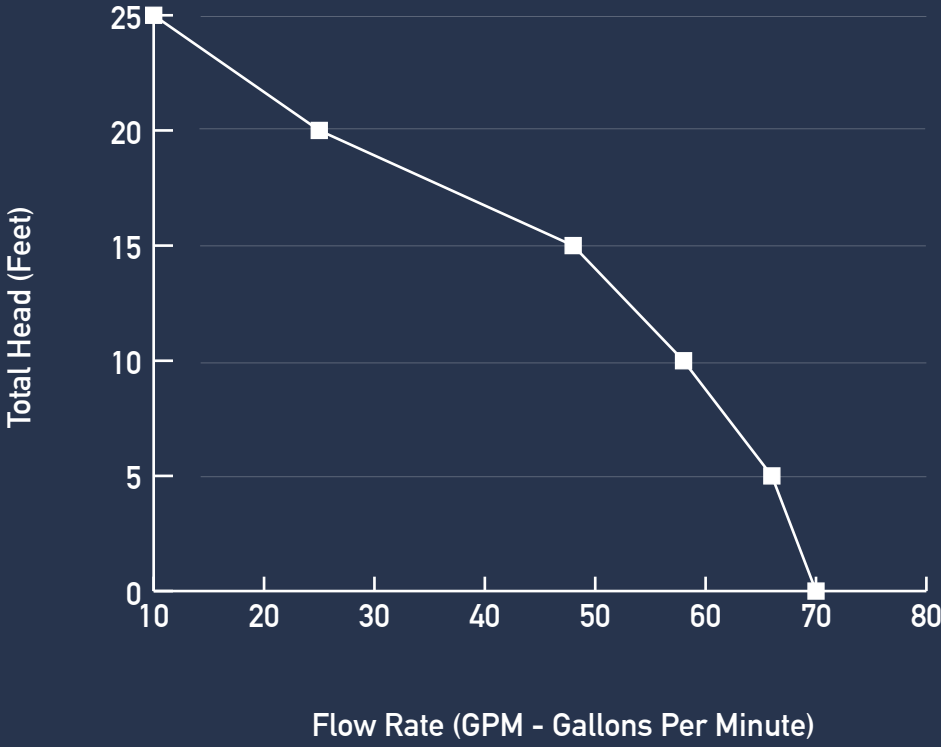

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	70	66	58	48	25	10
Gallons Per Hour	4200	3960	3480	2880	1500	600

92509 / 92525: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/2
AMPS	7.6
CONSTRUCTION	Cast Iron
SWITCH TYPE	Vertical
DISCHARGE SIZE	1-1/2"
DISCHARGE TYPE	Side
CORD LENGTH	92509 - 10' / 92525 - 25'
SOLIDS HANDLING	5/8"
IMPELLER TYPE	Thermoplastic, Non-Clogging Vortex
SWITCH ON POINT	8.5"
SWITCH OFF POINT	2"
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	1" From Surface When Used As Utility
WARRANTY	1 Year

92509 / 92525: OPTIONAL ACCESSORIES

BATTERY BACKUP	CHECK VALVES	ALARMS
BASINS	BASIN COVERS	HOSE KIT
ADAPTERS	BASE	FILTERS