


93511 / 93525: PERFORMANCE

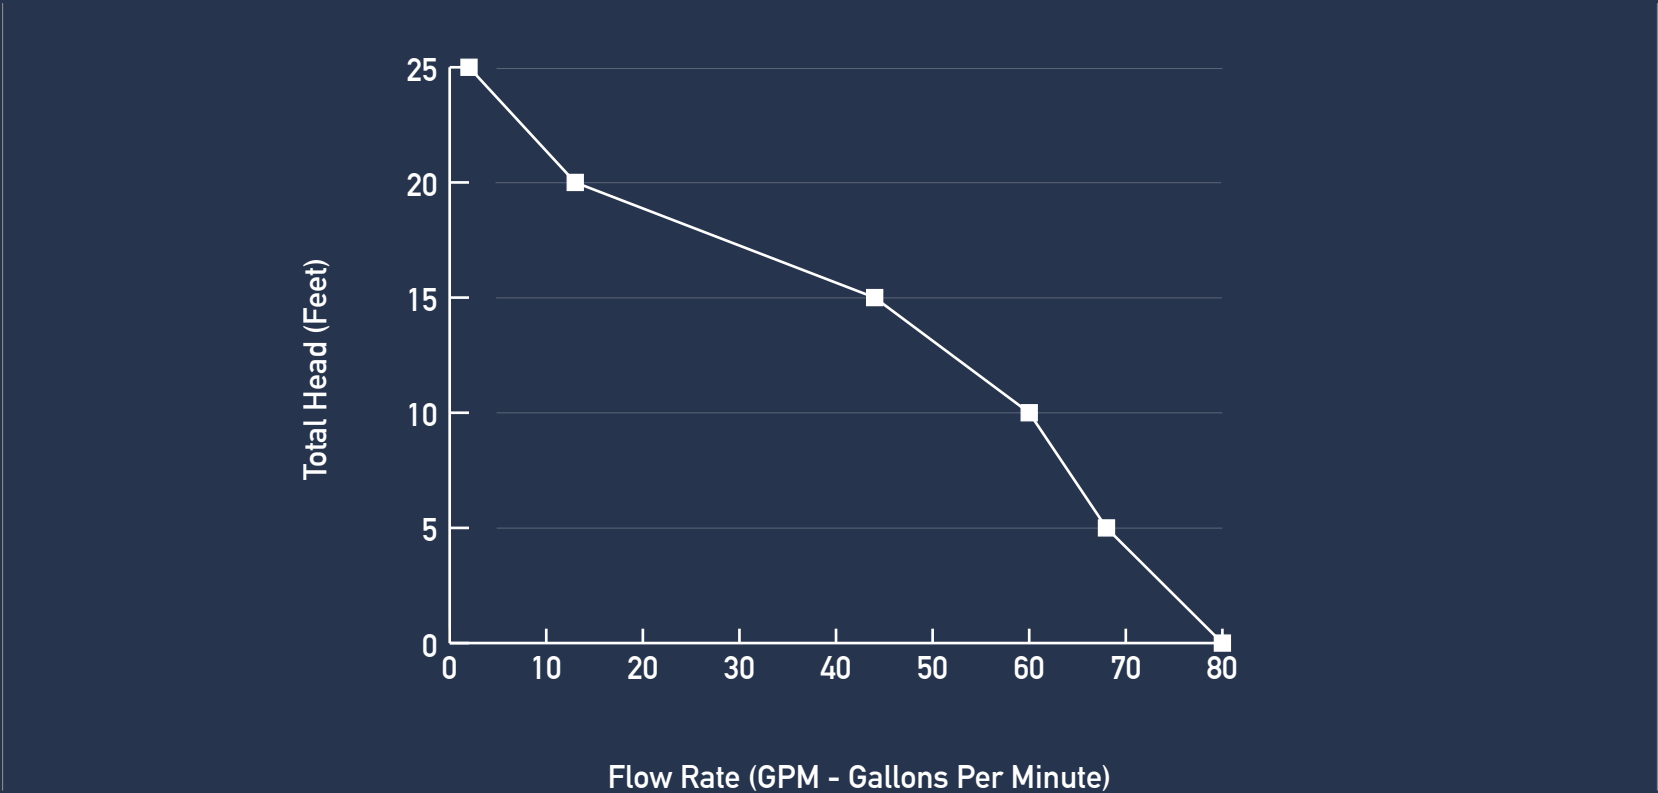

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	80	68	60	44	13	2
Gallons Per Hour	4800	4080	3600	2640	780	120

93511 / 93525: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/2
AMPS	7.6
CONSTRUCTION	Cast Iron
SWITCH TYPE	Vertical
DISCHARGE SIZE	2"
DISCHARGE TYPE	Side
CORD LENGTH	93511 - 10' / 93525 - 25'
SOLIDS HANDLING	2"
IMPELLER TYPE	Thermoplastic, Non-Clogging Vortex
SWITCH ON POINT	9"
SWITCH OFF POINT	3"
LIQUID TEMP. RANGE	35° F - 120° F
PUMPS DOWN TO	3" From Surface When Used As Utility
WARRANTY	1 Year

93511 / 93525: OPTIONAL ACCESSORIES

BASINS	BASIN COVERS	ALARMS
ADAPTERS	CHECK VALVES	