


# 92911: PERFORMANCE

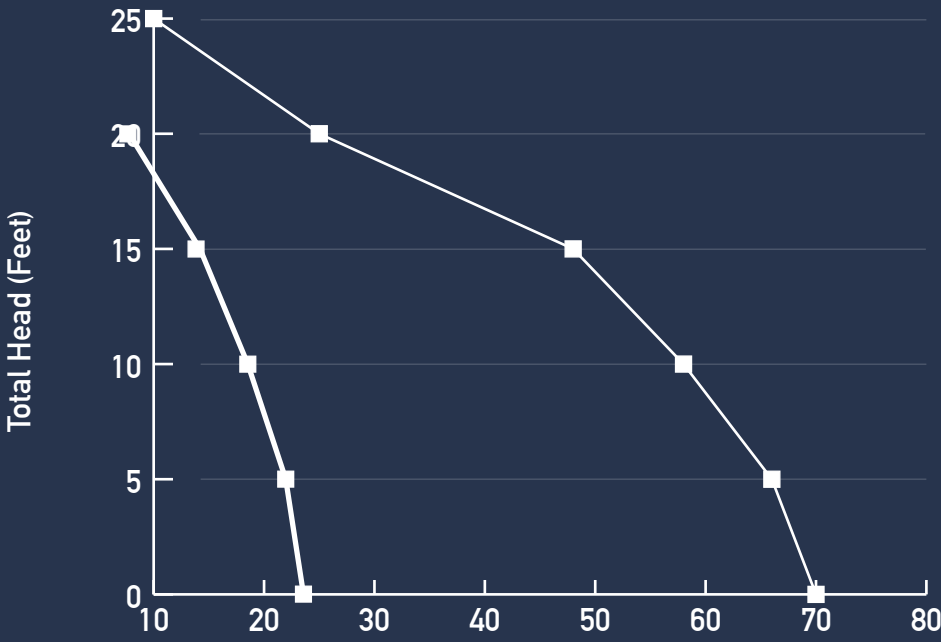

**BACKUP - 92910 | PRIMARY - 92511**  
low Rate (GPM - Gallons Per Minute)

## BACKUP - 92910

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	23	22	18	13	8	-
Gallons Per Hour	1380	1320	1080	780	480	-

## PRIMARY - 92511

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	70	66	58	48	25	10
Gallons Per Hour	4200	3960	3480	2880	1500	600

# 92911: TECHNICAL SPECIFICATIONS

PUMP TYPE / MODEL	Thermoplastic Backup / 92910	Cast Iron Primary / 92511
HORSEPOWER	DC	1/2
DRAW	12 volt	7.6 amps
SWITCH TYPE	Vertical	Vertical
DISCHARGE SIZE	1-1/4" or 1-1/2"	1-1/2"
DISCHARGE TYPE	Top	Side
CORD LENGTH	10'	10'
SOLIDS HANDLING	1/8"	1/2"
IMPELLER TYPE	Thermoplastic	Thermoplastic
WARRANTY	3 Year	
BATTERY BOX	Thermoplastic Construction	
ELECTRONIC PANEL	Indicator lights and fuse	
RECOMMENDED BATTERY	12 Volt deep cycle - sold separately	

# 92911: OPTIONAL ACCESSORIES

BASINS	BASIN COVERS	ADAPTERS
--------	--------------	----------