


92941: PERFORMANCE

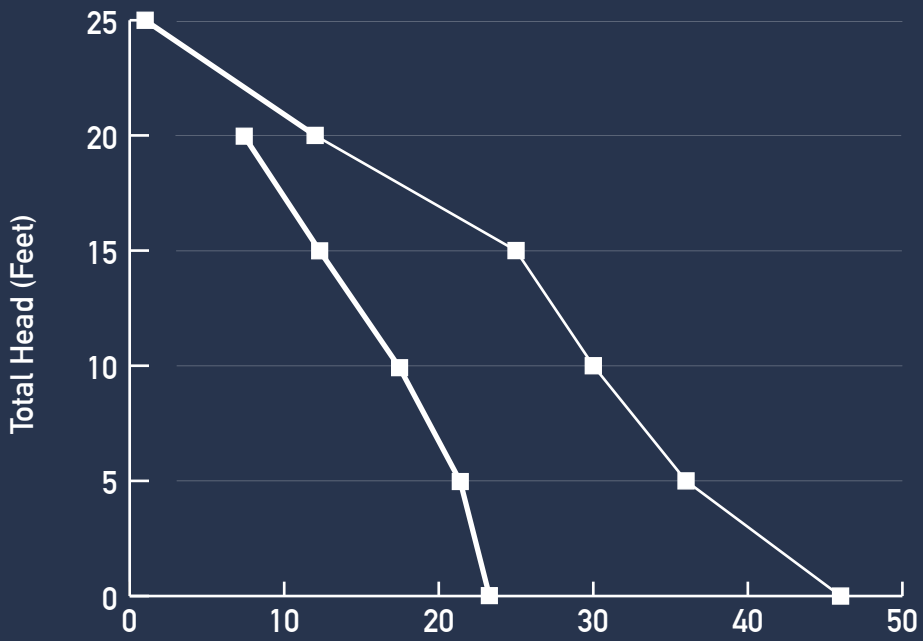

BACKUP - 92910 | PRIMARY - 92341
low Rate (GPM - Gallons Per Minute)

BACKUP - 92910

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	23	22	18	13	8	-
Gallons Per Hour	1380	1320	1080	780	480	-

PRIMARY - 92341

HEAD	0'	5'	10'	15'	20'	25'
Gallons Per Minute	46	36	30	25	12	1
Gallons Per Hour	2760	2160	1800	1500	720	60

92941: TECHNICAL SPECIFICATIONS

PUMP TYPE / MODEL	Thermoplastic Backup / 92910	Cast Iron Primary / 92341
HORSEPOWER	DC	1/3
DRAW	12 volt	4.1 amps
SWITCH TYPE	Vertical	Vertical
DISCHARGE SIZE	1-1/4" or 1-1/2"	1-1/2"
DISCHARGE TYPE	Top	Side
CORD LENGTH	10'	10'
SOLIDS HANDLING	1/8"	3/8"
IMPELLER TYPE	Thermoplastic	Stainless Steel
WARRANTY	3 Year	
BATTERY BOX	Thermoplastic Construction	
ELECTRONIC PANEL	Indicator lights and fuse	
RECOMMENDED BATTERY	12 Volt deep cycle - sold separately	

92941: OPTIONAL ACCESSORIES

BASINS	BASIN COVERS	ADAPTERS
--------	--------------	----------